

DOUBLE ACTING AIR PUMPS

FEATURES

- Double Acting for faster retraction
- High strength metal reservoir eliminates reservoir cracking
- Shop air pressure range of 40-170 psi
- Internal pressure relief valve protects from overloading
- Maximum working pressure at 10,000 psi






PAD462



PAD90



PAD232

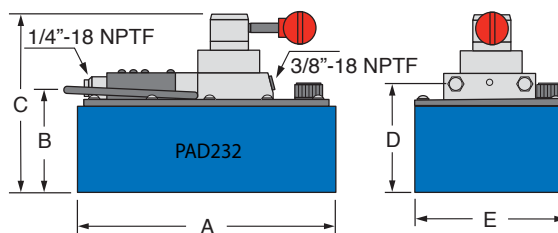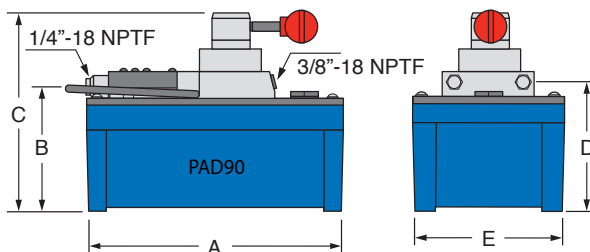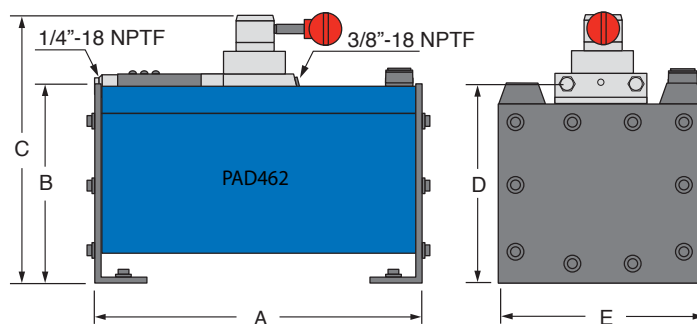

Model #	Usable Oil Capacity	Oil Output Flow Range (in. ³ /min.)		Air Pressure Range (psi)	Dimensions (in.)					Valve Function		Weight (lbs.)
	(in. ³)	0 PSI	10,000 PSI		A	B	C	D	E			
PAD90	90	84	19	40-170	5.03	2.58	8.15	2.72	5	Double Acting	4W3P	16.87
PAD232	232	84	19	40-170	12.6	5.29	8.28	5.56	7.38	Double Acting	4W3P	24.69
PAD462	462	85	19	40-170	13.78	7.64	10.63	7.91	9.84	Double Acting	4W3P	41.23